




ERQ Series Stopper Cylinder(Fixed Mounting height)

Hot



ERQA 60x75R

How to Order?

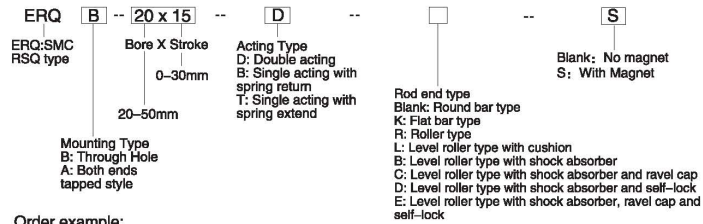

Order example:


- \* ERQ Series Cylinder, Bore 20mm, stroke 15mm, through hole mounting, double acting spring, chamfered type, Model: ERQB 20x15BK
- \* ERQ Series Cylinder, Bore 40mm, stroke 30mm, with magnet, both ends female thread, single acting spring extend, level type(with adjustable shock absorber and ravel cap), Model: ERQA 40x30TCS

Specifications

Bore Size(mm)	20	32	40	50	Bore Size(mm)	20	32	40	50
Acting Type	Double acting, Double acting with spring, Single acting spring extent				Working Temperature	-10~70 (with magnet switch: max. 80°C)			
Rod Ends Type	Round bar type, Chamfered type, Roller type				Cushion	Both ends rubber cushion			
Working Medium	Clean air (25 μ filtration)				Stroke Tolerance	+1.4mm			
Guaranteed Pressure(Bar)	15				Lubrication*	Not Required			
Max. Working Pressure(Bar)	10				Mounting Type	Through hole, both ends female thread			
					Port Size	Rc(PT) 1/8			

SHL2 Series Parallel style wide Opening Air Gripper

How to Order?

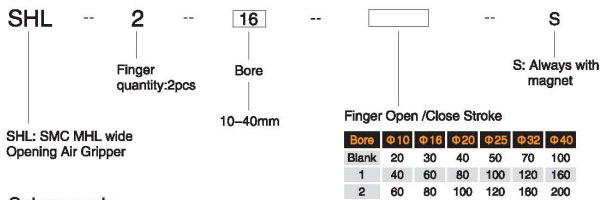

Order example:

- \* SHL2 Series, bore 16mm, stroke 30mm, Model:SHL2-16DS
- \* SHL2 Series, bore 25mm, stroke 120mm, Model:SHL2-25D2S

Specifications

Bore(mm)	10	16	20	25	32	40
Working Medium	Clean air (25 μ filtration)					
Acting Type	Double acting					
Guaranteed pressure (Bar)	6					
Min. working pressure(Bar)	1.5	1.0				
Working temperature (°C)	-10~60					
Repeatability (mm)	±0.1					
Effective gripping force (N) at 5Bar *	14	45	74	131	228	396
Port Size	M5x0.8			G1/8		

\* Gripping Point=Bore Size 10,16,20,25:40mm; Bore Size 32,40:80mm

New




SHL2-10DS

SHT2 Series Angle Style Air Gripper Toggle type



SHT2-32DS

How to Order?



Order example:


- \* Toggle type Air Gripper: 30N · m, Model: SHT2-40DS
- \* Toggle type Air Gripper: 100N · m, Model: SHT2-63DS

Specifications

Model	SHT2-32D	SHT2-40D	SHT2-50D	SHT2-63D
Bore(mm)	32	40	50	63
Acting Type	Double Acting			
Working Medium	Clean air (25 μ filtration)			
Range of working pressure (Bar)	1-6			
Working temperature (°C)	5-60			
Lubrication	Not Required			
Finger Open/Close Angel	-3° ~28°	-3° ~27°	-2° ~23°	-2° ~23°
Weight ( kg )	0.80	1.09	1.93	2.8
Effective gripping force (N)	12.4	36.0	63.0	106

SHZ2/SHC2 Style Air Gripper

How to Order?

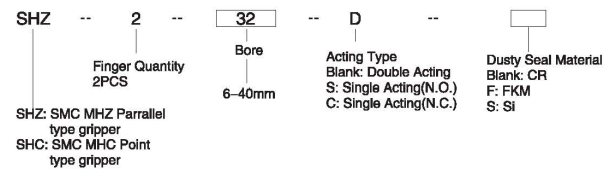

Order example:

- \* SHZ2 type parallel type gripper, double acting, 20mm bore, Model: SHZ2-20D
- \* SHC2 type point type gripper, single acting, 16mm bore, Model: SHC2-16S

Specifications

Cylinder Diameter (mm)	6	10	16	20	25	32	40	Cylinder Diameter (mm)	6	10	16	20	25	32	40
Working medium	Clean Air(25 μ filtration)														
Minimum Working pressure (Bar)	0.2														
Acting type	Double Acting														
Max. pressure(Bar)	7														
Maximum Working pressure(Bar)	1.5	2	1												
	3	3.5	2.5												
Medium Temperature(°C)	0~+60														
Max.acting frequency	+0.01														
Lubrication	Not Required														
Magnet	always have														
Thread Size	M3X0.5			M3X0.8											

Hot

