




ERQ Series Stopper Cylinder(Fixed Mounting height)

Hot



ERQA 60x75R

How to Order?

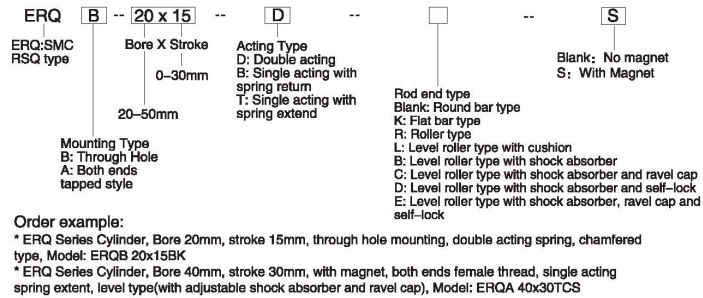


Specifications

Bore Size(mm)	20	32	40	50	Bore Size(mm)	20	32	40	50
Acting Type	Double acting, Double acting with spring, Single acting spring extent				Working Temperature	-10~70 (with magnet switch: max. 80°C)			
Rod Ends Type	Round bar type, Chamfered type, Roller type				Cushion	Both ends rubber cushion			
Working Medium	Clean air (25 μ filtration)				Stroke Tolerance	+1.4mm			
Guaranteed Pressure(Bar)	15				Lubrication*	Not Required			
Max. Working Pressure(Bar)	10				Mounting Type	Through hole, both ends female thread			
					Port Size	Rc(PT) 1/8			

SHL2 Series Parallel style wide Opening Air Gripper

How to Order?

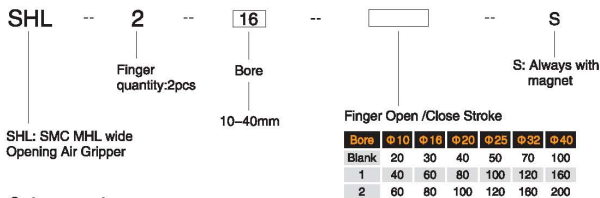

Order example:
* SHL2 Series, bore 16mm, stroke 30mm, Model:SHL2-16DS
* SHL2 Series, bore 25mm, stroke 120mm, Model:SHL2-25D2S

Specifications

Bore(mm)	10	16	20	25	32	40
Working Medium	Clean air (25 μ filtration)					
Acting Type	Double acting					
Guaranteed pressure (Bar)	6					
Min. working pressure(Bar)	1.5	1.0				
Working temperature (°C)	-10~60					
Repeatability (mm)	±0.1					
Effective gripping force (N) at 5Bar *	14	45	74	131	228	396
Port Size	M5x0.8			G ¹ / ₈		

* Gripping Point=Bore Size 10,16,20,25:40mm; Bore Size 32,40:80mm

New



SHL2-10DS




SHT2 Series Angle Style Air Gripper Toggle type



SHT2-32DS

How to Order?




Order example:

* Toggle type Air Gripper: 30N · m, Model: SHT2-40DS
* Toggle type Air Gripper: 100N · m, Model: SHT2-63DS

Specifications

Model	SHT2-32D	SHT2-40D	SHT2-50D	SHT2-63D
Bore(mm)	32	40	50	63
Acting Type	Double Acting			
Working Medium	Clean air (25 μ filtration)			
Range of working pressure (Bar)	1-6			
Working temperature (°C)	5-60			
Lubrication	Not Required			
Finger Open/Close Angel	-3° ~28°	-3° ~27°	-2° ~23°	-2° ~23°
Weight (kg)	0.80	1.09	1.93	2.8
Effective gripping force (N)	12.4	36.0	63.0	106

How to Order?

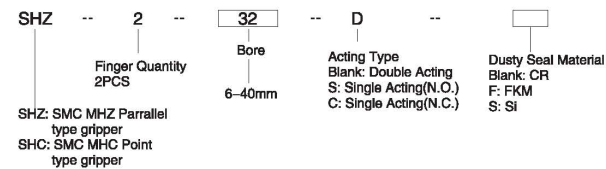

SHZ: SMC MHZ Parallel type gripper
SHC: SMC MHC Point type gripper

Order example:
* SHZ2 type parallel type gripper, double acting, 20mm bore, Model: SHZ2-20D
* SHC2 type point type gripper, single acting, 16mm bore, Model: SHC2-16S

Specifications

Cylinder Diameter (mm)	6	10	16	20	25	32	40	Cylinder Diameter (mm)	6	10	16	20	25	32	40
Working medium	Clean Air(25 μ filtration)														
Minimum Working pressure (Bar)	0.2														
Acting type	Double Acting														
Max. pressure(Bar)	7														
Maximum Working pressure(Bar)	1.5	2	1												
	3	3.5	2.5												
Medium Temperature(°C)	0-+60														
Max.acting frequency	+0.01														
Lubrication	Not Required														
Magnet	always have														
Thread Size	M3X0.5			M3X0.8											

Hot

